


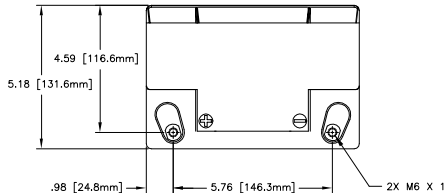


NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00301 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).



REFERENCE VIEW

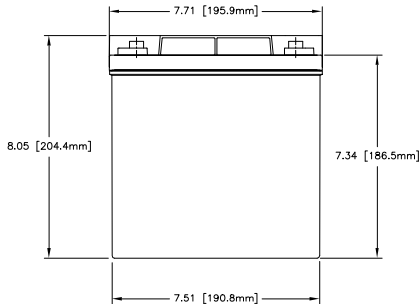

CAPACITY RATINGS	
PART NUMBER	PVX-420T
NOMINAL WEIGHT	30 LBS[13.6 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77F (25° C)	42 AH

ENVELOPE DRAWING

REV	DESCRIPTION	DATE	APPROVED
PARTS LIST			
UNITED STATES SPECIFIED TOLERANCES ARE IN INCHES	CONTRACT NO.		
FRACTIONS DECIMALS ANGLES	NA		
± 1/32 .001 ± .06 ± 1°	APPROVALS	DATE	TITLE
± .001	ELR	8/13/01	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD., W. COVINA, CA 91790
TREATMENT	CHECKED	DATE	BATTERY, SLA, 12 VOLT, PVX-420T
FRESH NONE	HRF	8/20/01	
APPROVED	JBT	8/23/01	CASE CODE
APPROVED	AT	8/24/01	DWG NO. PVX-420T
SCALE TO NA	SCALE	AT	SCALE NONE
			DWG NO. PVX-420T
			REV
			SHEET 1 OF 1